

Curb Options

Roof Hatch and Automatic Smoke Vent

Standard Curb

- 12" (305mm) in height. Custom curb heights are also available.
- Includes capflashing for installation of roofing material.
- 3-1/2" (89mm) anchor flange [5-1/2" (140mm) on thermally broken models].
- 1" (25mm) rigid fiberboard insulation (R=3.81). Thermally broken models are available with 3" (75mm) of poly-isocyanurate insulation (R=20.3).




Curb Liner

- 12" (305mm) in height. Custom curb heights are also available.
- Includes capflashing for installation of roofing material.
- 3-1/2" (89mm) anchor flange [5-1/2" (140mm) on thermally broken models].
- 1" (25mm) rigid fiberglass insulation (R=4.63). Thermally broken models available with 3" (75mm) of poly-isocyanurate insulation (R=20.3).
- Metal liner protects the curb insulation. Liner is the same gauge material as the curb.




Fully Enclosed Curb

- 12" (305mm) in height. Custom curb heights are also available.
- No capflashing
- 3-1/2" (89mm) anchor flange [5-1/2" (140mm) on thermally broken models].
- 1" (25mm) rigid fiberglass insulation (R=4.63). Thermally broken models available with 3" (75mm) of poly-isocyanurate insulation (R=20.3).
- Insulation incorporated into the frame and protected from the elements.

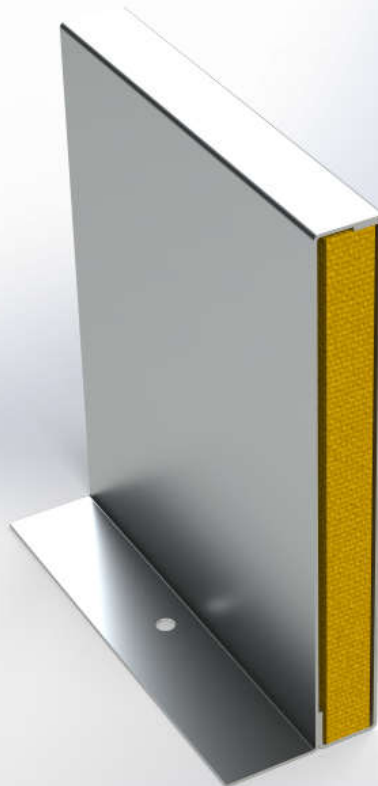

Fully Enclosed Curb with Standing seam Roof Modification

- Fully enclosed curb with the base flange modified to simplify installation on a standing seam roof. Specify roof panel manufacturer, model and on center distance of ribs.

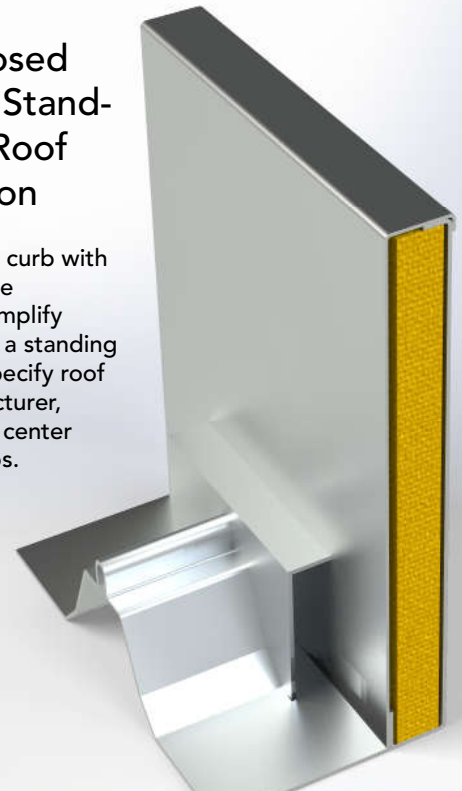

Please contact The BILCO Company for additional custom curb options.

Experience. Innovation.